



SL™ MOWER Self Leveling Hitch

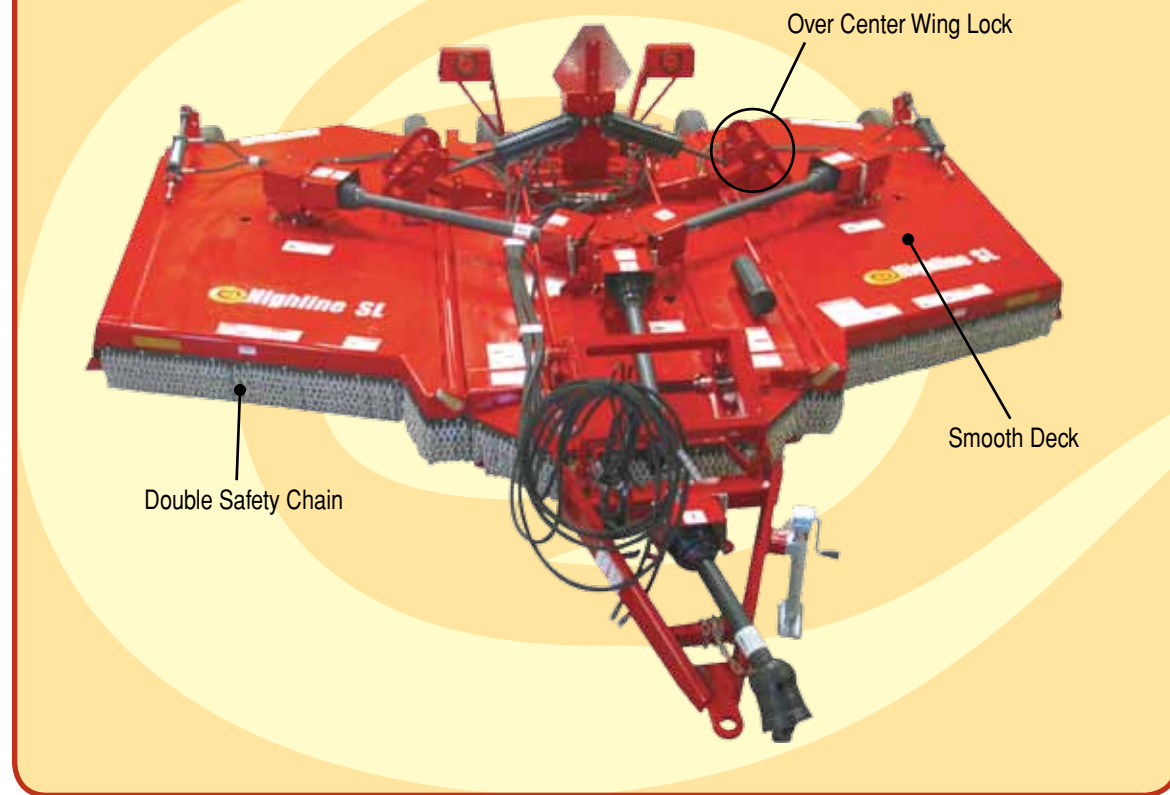

RCH™ MOWER Radial Contouring Hitch

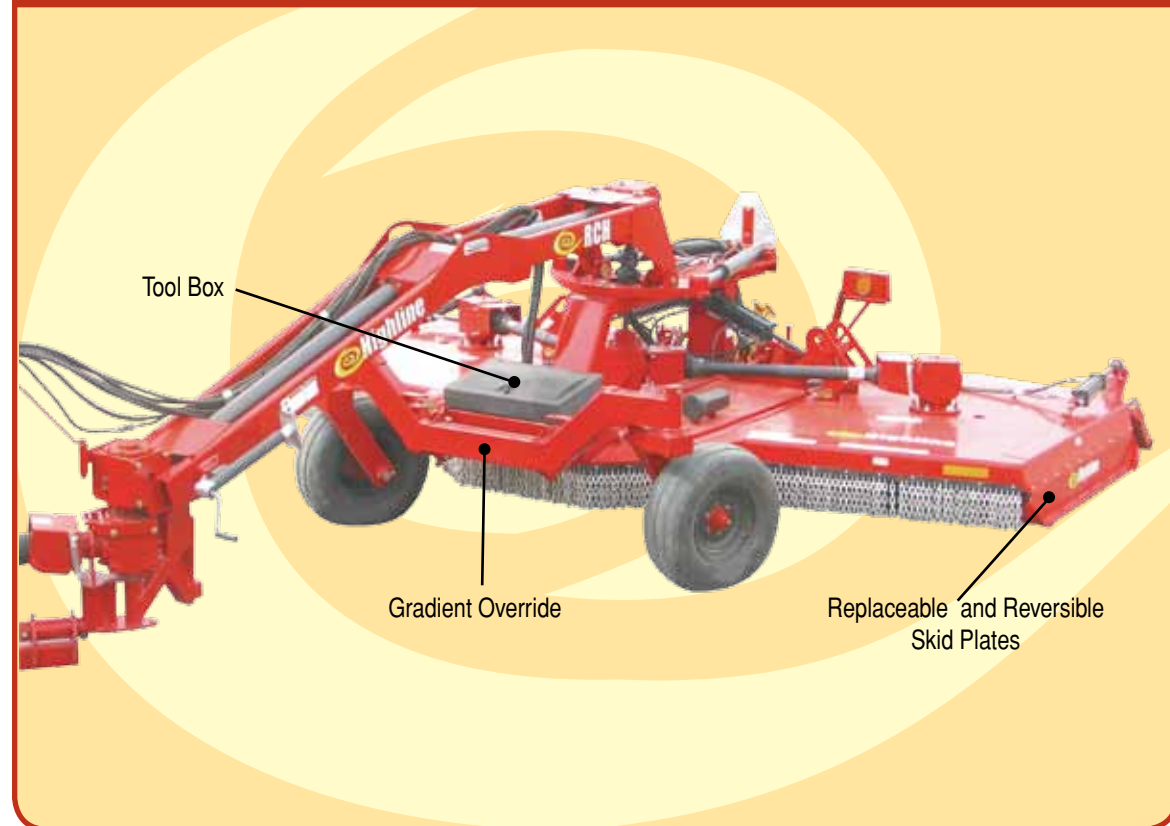

STANDARD MOWER FEATURES



Quality cut from efficient blades & unique pan design.



Automatic over-centering wing linkage allow the operator to lower, raise and lock the outer wings of the mower from the safety of the tractor cab.



All drive lines and gearboxes are protected by self adjusting clutches.



Highline designed and built gearboxes meet the demands for performance and durability.



Laminated tires reduces chance of a flat tire resulting in less downtime. Rear tire options include air or foam filled tires.



Replaceable and reversible skid plates give twice the usable life. Smooth deck for easy cleaning.



Simple blade changes with easy access blade bolts.

Convert the SL™ Mower into an RCH™ Mower



Base SL™ Model



Remove hitch, wheels, gearbox



Add hitch tower



Add front and rear wheels



Add hitch and gearboxes

RCH™ Features



Drive your tractor on a safe footing while ReaCHing into more difficult places with the mower. The RCH™ design allows the tractor to remain on the road on a safe level footing. There is no need to run dual tires to increase stability. No more tractors stuck in soft ditches. Gone are the days of putting your foot on the tractor window to keep yourself in the seat, reducing driver fatigue.



Mow at any angle to the left or the right or behind on flat areas. The mower can ReaCH either side without requiring a configuration change.

No need to steer the tractor around stop signs or obstacles— just use the hydraulic controls to rotate the deck and move the mower. Large Front Tires assist in ground contouring and provide good flotation.



Gradient Over-Ride Turned Off



Gradient Over-Ride Turned On



The heart of a Highline mower is the RCH™ (Radial Contouring Hitch) system which is designed to keep the tractor on the road and the operator safe while achieving a quality cut.

SPECIFICATIONS

Cutting Swath	120" and 180"
Blade Size	1/2" x 4"
Cutting Capacity	3.5" diameter
Cutting Height	2" - 15" (5cm to 38cm)
SL™ Weight	6000 lbs (2721 kg)
SL™ Tongue Weight	2030 lbs (920 kg)
RCH™ Weight	7800 lbs (3538 kg)
RCH™ Tongue Weight	650 lbs (295 kg)
Wing Working Range	Down 25 degrees; Up 55 degrees
Gearbox Rating	250 HP
Recommended Tractor HP Rating	110 HP


OPTIONS



TCW (Terrain Contouring Wheel)



Life Extension Skins



Toolbox



Gearbox Temperature Sensors




Liquid Applicator System for weed control while mowing

Highline Manufacturing reserves the right to make changes in design, materials and/or specifications without notice and without liability therefor. All rights reserved. Highline is a registered trademark. Any trademarks referred to herein is the property of Highline Manufacturing. Learn more at www.highlinemfg.com



Box 307, Hwy 27
Vonda, SK. S0K 4N0
Toll Free: 800-665-2010
Outside Canada: (306) 258-2233
www.highlinemfg.com

SL™ RCH™ MOWERS

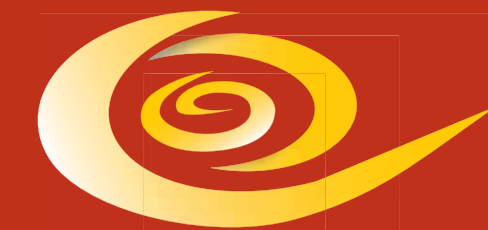

Highline

MANUFACTURING LTD.